

# 24" Extension Model G24

## User *Guide*

**KidCo, Inc.**

## Important Notes

# FOLLOW THESE INSTRUCTIONS CAREFULLY AND KEEP THEM FOR FUTURE REFERENCE

### Model G24 - 24" Extension

#### For Model G60 - ELONGATE

Use 1 optional 24" extension (Model G24) when opening is between 5' to 7' wide.

Use 2 optional 24" extensions (Model G24) when opening is 7' to 9' wide.

Use 3 optional 24" extensions (Model G24) when opening is 9' to 11' wide.

Use 4 optional 24" extensions (Model G24) when opening is 11' to 13' wide.

Maximum 4 extensions per gate


#### For Model G20 - SAFEWAY

Use optional 24" extension (Model G24) for openings 43 1/2" to 66" wide.

Only one extension recommended per gate,

## Parts List

Adjustment holes



1 - 24" Extension




4 Expansion screw sockets



4 Expansion screws



# Assembly

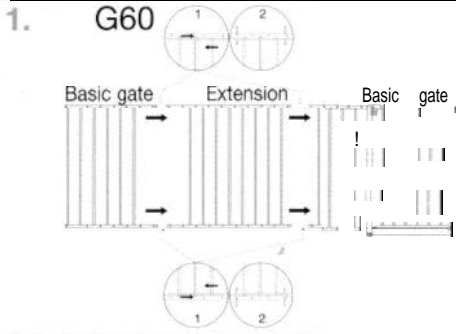

Place extension between the two basic gate sections.


Adjust gate sections, until gate is approximately right width and adjustment holes are aligned on top and bottom. Sections should fit without any distance between **bars**.

When adding more than one extension (G60 only) add in continuation of first extension.

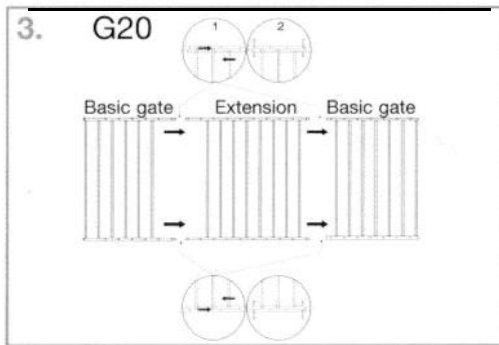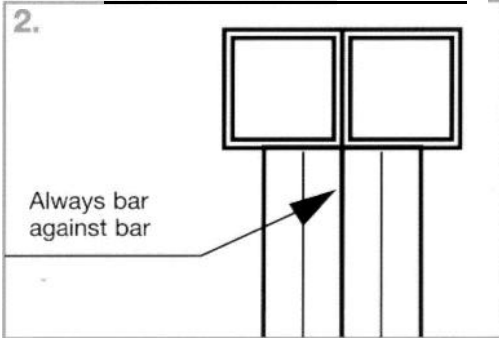

## IMPORTANT

Gate must **NOT** be extended any further than 4 holes from spindle ends.

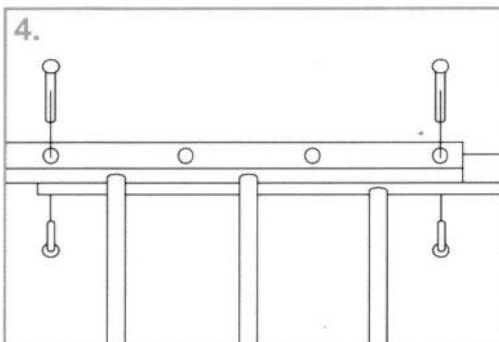

Place one set of expansion screws and screw sockets in top and bottom set of overlapping adjustment holes nearest hinge side of gate and second set of expansion screws and screw sockets in overlapping holes nearest locking side of gate. Tighten with a screwdriver.